

05-22-00

A

PATENT

Attorney Docket No. MPATENT.158A

Date: May 18, 2000

Page 1

JC834 U.S. PTO
05/18/00ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Michael V. Leman and William M. Creese

For: REMOTE COMPUTER CONTROLLER AND CONTROL METHOD

Enclosed are:

- (X) 3 sheet(s) of drawings.
- (X) Recordation form cover sheet with 2-page assignment.
- (X) A power of attorney form and copy of assignment.
- (X) Initial signed declaration by inventor(s).
- (X) Return prepaid postcard.

JC520 U.S. PTO
09/574736
05/18/00

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$690	\$690
Total Claims	19 - 20 =	0 ×	\$18	\$0
Independent Claims	9 - 3 =	6 ×	\$78	\$468
If application contains any multiple dependent claims(s), then add			\$260	\$0
TOTAL FILING FEE		\$1158		

- (X) A check in the amount of \$1158 to cover the filing fee is enclosed.
- (X) A check in the amount of \$40 to cover the assignment recording fee.
- (X) The Commissioner is hereby authorized to charge any additional fees which may be required, now or in the future, or credit any overpayment to Account No. 11-1410. A duplicate copy of this sheet is enclosed.

PATENT

Attorney Docket No. MPATENT.158A

Date: May 18, 2000

Page 2

(X) Please use Customer No. 20,995 for the correspondence address.

Thomas R. Arno
Registration No. 40,490
Attorney of Record

S:\DOCS\TRA\TRA-3572.DOC
051800

KNOBBE, MARTENS, OLSON & BEARA LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS**PATENT, TRADEMARK AND COPYRIGHT CAUSES**

501 WEST BROADWAY

SUITE 1400

SAN DIEGO, CALIFORNIA 92101-3505

(619) 235-8550

FAX (619) 235-0176

INTERNET: WWW.KNOB.COM

LOUIS J. KNOBBE*
DON W. MARTENS*
GORDON H. OLSON*
JAMES B. BEAR
DARRELL L. OLSON*
WILLIAM B. BUNKER
WILLIAM H. NIEMAN
ARTHUR S. ROSE
JAMES F. LESNIAK
NED A. ISRAELSEN
DREW S. HAMILTON
JERRY T. SEWELL
JOHN B. SGANGA, JR.
EDWARD A. SCHLATTER
GERARD VON HOFFMANN
JOSEPH R. RE
CATHERINE J. HOLLAND
JOHN M. CARSON
KAREN VOGEL WEIL
ANDREW H. SIMPSON
JEFFREY L. VAN HOOSEAR
DANIEL E. ALTMAN
MARGUERITE L. GUNN
STEPHEN C. JENSEN
VITO A. CANUSO III
WILLIAM H. SHREVE
LYNDA J. ZADRA-SYMES†
STEVEN J. NATAUSKY
PAUL A. STEWART
JOSEPH F. JENNINGS
CRAIG S. SUMMERS
ANNEMARIE KAISER
BRENTON R. BABCOCK

THOMAS F. SMERAL, JR.
MICHAEL H. TRENHOLM
DIANE M. REED
JONATHAN A. BARNEY
RONALD J. SCHOENBAUM
JOHN R. KING
FREDERICK S. BERRETTA
NANCY WAYS VENSKO
JOHN P. GIEZENTANNER
ADEEL S. AKHTAR
GINGER R. DREGER
THOMAS R. ARNO
DAVID N. WEISS
DANIEL HART, PH.D.
DOUGLAS G. MUEHLHAUSER
LORI LEE YAMATO
MICHAEL K. FRIEDLAND
STEPHEN M. LOBBIN
STACEY R. HALPERN
DALE C. HUNT, PH.D.
LEE W. HENDERSON, PH.D.
DEBORAH S. SHEPHERD
RICHARD E. CAMPBELL
MARK M. ABUMERI
JON W. GURKA
ERIC M. NELSON
MARK R. BENEDICT, PH.D.
PAUL N. CONOVER
ROBERT J. ROBY
SABING H. LEE
KAROLINE A. DELANEY
JOHN W. HOLCOMB
JAMES J. MULLEN, III, PH.D.

JOSEPH S. CIANFRANI
JOSEPH M. REISMAN, PH.D.
WILLIAM R. ZIMMERMAN
GLEN L. NUTTALL
ERIC S. FURMAN, PH.D.
TIRZAH ABE LOWE
GEOFFREY Y. IIDA
ALEXANDER S. FRANCO
SANJIVPAL S. GILL
SUSAN M. MOSS
JAMES W. HILL, M.D.
ROSE M. THIESSEN, PH.D.
MICHAEL L. FULLER
MICHAEL A. GUILIANA
MARK J. KERTZ
RABINDER N. NARULA
BRUCE S. ITCHKAWITZ, PH.D.
PETER M. MIDDLEY
THOMAS S. MCCLENAHAN
MICHAEL S. OKAMOTO
JOHN M. GROVER
MALLARY K. DE MERLIER
IRFAN A. LATEEF
AMY C. CHRISTENSEN
SHARON S. NG
MARK J. GALLAGHER, PH.D.
DAVID G. JANKOWSKI, PH.D.
BRIAN C. HORNE
PAYSON J. LEMELLEUR
WILLIAM G. BERRY
DIANA W. PRINCE

OF COUNSEL
JERRY R. SEILER
JAPANESE PATENT ATTY
KATSUHIRO ARAI**
EUROPEAN PATENT ATTY
MARTIN HELLEBRANDT
KOREAN PATENT ATTY
MINCHEOL KIM
SCIENTISTS & ENGINEERS
(NON-LAWYERS)
RAIMOND J. SALENIKS**
NEIL S. BARTFELD, PH.D.**
DANIEL E. JOHNSON, PH.D.**
JEFFERY KOEPKE, PH.D.**
KHURRAM RAHMAN, PH.D.
JENNIFER A. HAYNES, PH.D.
BRENDAN P. O'NEILL, PH.D.
THOMAS Y. NAGATA
ALAN C. GORDON
LINDA H. LIU
YASHWANT VAISHNAV, PH.D.
MEGUMI TANAKA
ANDREW N. MERICKEL
CHE S. CHERESKIN, PH.D.**
JASON I. SAATHOFF
ERIK W. ARCHBOLD
PHILIP C. HARTSTEIN
JULIE A. HOPPER
CHRIS S. CASTLE
JAMES W. AUSLEY

* A PROFESSIONAL CORPORATION
† ALSO BARRISTER AT LAW (U.K.)
** U.S. PATENT AGENT

Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : MPATENT.158A

Applicant(s) : Michael V. Leman and William M. Creese

For : REMOTE COMPUTER CONTROLLER AND CONTROL METHOD

Attorney : Thomas R. Arno

"Express Mail"

Mailing Label No. : EL501132735US

Date of Deposit : May 18, 2000

I hereby certify that the accompanying

Transmittal in Duplicate; Specification in 17 pages; 3 sheets of drawings;
SIGNED Declaration by Inventor in 2 pages; Recordation Form Cover Sheet and
Assignment in 3 pages; Power of Attorney by Assignee in 2 pages; Check(s) for
Filing Fee(s); Return Prepaid Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

John J. Riedel

S:\DOCS\TRA\TRA-3573.DOC
051800

201 CALIFORNIA STREET
SUITE 1150
SAN FRANCISCO, CALIFORNIA 94111
(415) 954-4114
FAX (415) 954-4111

620 NEWPORT CENTER DRIVE
SIXTEENTH FLOOR
NEWPORT BEACH, CALIFORNIA 92660
(949) 760-0404
FAX (949) 760-9502

3801 UNIVERSITY AVENUE
SUITE 710
RIVERSIDE, CALIFORNIA 92501
(909) 781-9231
FAX (909) 781-4507

1875 CENTURY PARK EAST
SUITE 600
LOS ANGELES, CALIFORNIA 90067
(310) 407-5484
FAX (310) 407-5485

REMOTE COMPUTER CONTROLLER AND CONTROL METHODBackgroundField of the Invention

5 The invention relates to remote control of computers.

Description of the Related Art

10 In today's business world, personal computers are almost a necessity, and are commonly found in offices and employee workspaces. Generally, people turn their computer off when they leave the office after work in the evening. This is done to conserve energy, to address safety concerns common to all energized electrical appliances, and also in response to security concerns that someone other than the computer owner may gain access to sensitive business information. Thus, when most people arrive at the office in the morning, they must turn on their computer, wait for the system to boot up, and then launch some particular application program they will be using. This results in wasted time as the user sits and waits for the computer to complete the boot up process.

15 Currently, no computer system is available that addresses this problem. Various types of remote control systems for computers have been described and marketed, but none are particularly suitable for resolving the above described problem. Many conventional remote computer controllers, wireless mice and keyboards, for example, have a very short communication range, and/or require a clear line of sight between the wireless transmitter in the device and the receiver in the computer. This makes them impractical for use by a worker until entering the office. There would therefore be minimal, if any, time savings involved with the use of these devices to control initiation of computer operation.

20 Other remote control devices work over telephone connections. One example of such a system is provided by U.S. Patent No. 5,596,628 to Jon Klein. These systems, however, require the initiation of a telephone connection with the computer to be controlled. This is not convenient for solving the above described problem. For these reasons, a convenient and simple to operate computer system with remote computer power control is needed in the art.

Summary

The invention includes remotely controllable computer systems, methods of remote computer control, and devices for the remote control of computers. In one embodiment, the invention comprises a remote controlled computer system, including a computer comprising a wireless receiver and a hand-held controller comprising a wireless transmitter. The hand-held controller is configured to send a signal to the wireless receiver upon user actuation, and the computer is configured to perform a power on sequence and to launch a user-defined application program in response to receiving the signal.

In another embodiment the invention comprises a method of remotely controlling a computer comprising transmitting a signal from a hand-held controller to the computer, and in response thereto, placing the computer in an on state and launching a user specified application program.

One embodiment of a remote control device for a personal computer comprises a hand-held housing containing wireless signal transmission circuitry for communicating with wireless signal receiving circuitry in the personal computer. The housing comprises an attachment device for connecting the remote control device to a key ring, purse handle, or other commonly carried personal item. In another embodiment, a remote control device for a personal computer comprises a hand-held housing containing wireless signal transmission circuitry for communicating with wireless signal receiving circuitry in the personal computer and at least one user actuated control operative to initiate wireless signal transmission of a command to perform a power up sequence and launch a selected application program.

Brief Description of the Drawings

FIG. 1 is an overall perspective view of a hand-held computer controller in wireless communication with a personal computer according to one embodiment of the invention.

FIG. 2 is flow chart illustrating steps performed by a computer in response to received control signals according to one embodiment of the invention.

FIG. 3 is a block diagram of a computer system configured to receive and interpret control signals according to one embodiment of the invention.

Detailed Description of the Invention

Embodiments of the invention will now be described with reference to the accompanying Figures, wherein like numerals refer to like elements throughout. The terminology used in the description presented herein is not intended to be interpreted in any limited or restrictive manner, simply because it is being utilized in conjunction with a detailed description of certain specific embodiments of the invention. Furthermore, embodiments of the invention may include several novel features, no single one of which is solely responsible for its desirable attributes or which is essential to practicing the inventions herein described.

Referring now to Figure 1, a computer system in accordance with one embodiment of the invention comprises a controller 20. The controller 20 is advantageously small enough to fit comfortably in a person's hand as well as in a pocket, purse, automobile glove compartment, or the like. In one embodiment, the controller 20 comprises an attachment device 22. The attachment device 22 may be a suitably sized hole, a wire loop or ring, or other facility for attaching the controller 20 to a key ring, purse handle, or other commonly carried personal item.

The controller 20 also incorporates internal wireless transmission circuitry and an antenna (not shown) for wireless communication with a computer 24 that incorporates an antenna 26 and a wireless receiver. These aspects of the computer 24 will be described in more detail below with reference to Figure 3. Using a wireless link 28, the controller 20 sends commands to the computer 24. In one embodiment, the commands issued by the controller 20 are operative to place the computer in the on state and optionally to also launch a user specified application program such as a word processor, spreadsheet, web browser, CAD and CAE programs, etc.

As shown in Figure 1, one embodiment of the controller 20 has three user actuated push buttons. A first button 30 may initiate only computer 24 power up, but not launch any specific application programs. A second button 32 may initiate both power up and the launch of a first user defined application program. A third button 34 may initiate both power up and the launch of a second user defined application program. Thus, the user may have a choice of several different remote control operations. This embodiment may be used to eliminate time wasted by computer users while waiting for their computer to

boot up and load a desired application program. In a business or office environment, for example, a computer user may prefer to have their office computer on and running the moment they arrive at the office. In this embodiment, an advantageous range for the communication link 28 may be between approximately 200 and 500 feet. With this range, as the user is heading toward the office, they can press a button 30, 32, 34 on the controller 20, thereby initiating either only power up, or also power up plus the launch of a desired application. When they arrive at the office door a few minutes later, the computer is ready and waiting for them.

The construction of wireless transmitter and receiver circuitry suitable for implementing the wireless link 28 is well known and will not be described in detail herein. This technology is used in applications such as garage door openers, keyless entry systems for automobiles, as well as other currently available commercial applications, and a wide variety of specific designs could be used in the controller 20 and computer 24 without altering the character of the system. The 200 to 500 foot range may be advantageous in that it is far enough to generally provide two or more minutes between initiation of power up and arrival of the user at the computer 24, but it is not so far to become an excessive drain on one or more batteries internal to the controller 20. Longer ranges of 900 or more feet may also be advantageous, especially in those instances where the resulting reduction of battery life is not a major concern.

One embodiment of a method of response of the computer 24 to the actuation of the buttons 30, 32, 34 on the controller 20 is illustrated in Figure 2. The method begins at step 40 when the computer 24 receives a wireless transmission signal from the controller 20. As also shown below in Figure 3, the wireless message reception and analysis circuitry in the computer 24 is continually in the on-state, even when the remainder of the computer 24 is in an off-state. The signal received by the computer 24 advantageously includes at least two pieces of information for use by the computer 24. The first is a controller hardware identification code. The second is an instruction code that designates which application program, if any, should be launched.

At the next step 42, the computer 24 checks the controller hardware identification code, and compares it to an internally stored identification code. If, at step 44, these two codes match, the computer 24 accepts the remainder of the transmitted data and, at step

46, stores the transmitted instruction code. If the codes do not match, at step 48 the computer 24 ignores the remainder of the message. In analogy with garage door openers and automotive keyless entry systems, this step 42 allows simultaneous use of different controllers 20 in proximity to one another in a single office building for example. In this way, the computer 24 only responds to control instructions from the controller 20 in the possession of the operator of the computer 24.

After storing the instruction code, at step 50 the computer initiates a power up sequence. As described below with reference to Figure 3, this step advantageously includes activating the computer power supply and loading the operating system software. At step 52, the computer 24 retrieves and interprets the stored instruction code, and at step 54, the computer launches the appropriate application program as specified by the retrieved instruction code.

Referring now to Figure 3, the computer 24 advantageously includes a processor and memory circuitry 60 and a storage device 62 that may, for example, comprise a hard disk drive. The computer 24 also includes remote control interface circuitry 64 for receiving signals and/or data from the remote transmitter 20. The computer 24 further includes a power supply 66 that supplies power to all of the electrical components of the computer 24. The processor and memory circuits 60, the storage device 62, and the remote control interface circuitry 64 are coupled through a bus system 70. Although not illustrated for purposes of clarity, those of skill in the art will appreciate that the bus system 70 will typically comprise a set of busses of varying format that communicate through bridge circuitry. The remote control interface circuitry 64 may be incorporated into the computer 24 in a variety of ways. It may comprise a daughter printed circuit board which plugs into an expansion slot in the computer 24. Alternatively, it may be incorporated directly onto a motherboard in the computer 24 that also mounts the processor and memory circuits 60. The remote control interface circuitry 64 is continually powered by a battery 72 so that it can receive and process wireless signals transmitted to the computer 24 even when the computer 24 is in an off state.

The storage device 62 stores, among other things, several application programs 74a, 74b, 74c. As discussed above, it is one of these programs that the user may wish to remotely launch. The storage device 62 also contains a remote on program 76. In this

embodiment, the remote controller 20 sends a signal to the remote control interface circuitry 64 which includes the controller identification code 78 and one of the instruction codes 80 or 82. The remote control interface circuitry 64 then compares the received identification code with a stored identification code 84. If the two match, the remote control interface circuitry 64 stores the received instruction code in an instruction code register 86.

After storing the instruction code in the register 86, the remote control interface circuitry activates the power supply 66 by asserting an output 88 which is connected to the power supply circuitry 66. This may be accomplished in a wide variety of ways which are well understood by those in the art. Asserting the output line 88 may close a relay in the AC power lines to the power supply, for example. In an advantageous embodiment, the power supply includes a low voltage secondary on/off signal line that toggles the supply from an off state to an on state when asserted. In this embodiment, the output 88 is coupled to this secondary on/off signal line.

Upon the application of power, the computer 24 will load its operating system software. A variety of operating systems are currently utilized in the computer industry, including Unix(TM), Linux(TM), DOS(TM), and Windows(TM). At this time, a large majority of the currently commercially available personal computers automatically load Windows(TM) upon power up. Furthermore, Windows(TM) includes a Startup utility, which allows the user to list one or more application programs that Windows(TM) will load and run automatically when the computer 24 is powered up.

In the embodiment of Figure 3, the remote on program 76 is listed in the Startup utility for automatic launch when the computer is powered up. The remote on program 76 causes the computer to perform an I/O operation to retrieve the instruction code stored in the instruction code register 86. Using a table which is part of the remote on program 76 that cross references instruction codes with application programs 74a, 74b, 74c, the remote on program 76 determines which application program the user wishes to have launched, and initiates the loading of this user selected application program.

With the controller 20 illustrated in Figure 1, depending on the button 30, 32, 34 pushed on the remote controller 20, different instruction codes will be sent and stored in the instruction code register 86, resulting in the launch of different application programs.

If the user only wants to power the computer up without launching a program, this may be accomplished by sending, for example, all zeros as an instruction code when the appropriate button 30 is pushed on the controller 20. This may be interpreted by the remote on program 76 as an instruction to load no additional application program. In addition, the remote control interface circuitry could be provided with a connection 90 to the power supply output. In an embodiment with this connection 90, if the power supply is activated locally with the power switch, the power supply output may be sensed, and the remote control interface circuit could be configured load zeros into the instruction code register in response so that no application program is automatically loaded as may be the case with the remote power up procedure. A convenient remote controller is therefore provided which is easy to carry, simple to operate, and which saves computer users time.

The foregoing description details certain embodiments of the invention. It will be appreciated, however, that no matter how detailed the foregoing appears in text, the invention can be practiced in many ways. As is also stated above, it should be noted that the use of particular terminology when describing certain features or aspects of the invention should not be taken to imply that the terminology is being re-defined herein to be restricted to including any specific characteristics of the features or aspects of the invention with which that terminology is associated. The scope of the invention should therefore be construed in accordance with the appended claims and any equivalents thereof.

WHAT IS CLAIMED IS:

1. A remote controlled computer system, comprising:
a computer comprising a wireless receiver;
a hand-held controller comprising a wireless transmitter;
5 wherein said hand-held controller is configured to send a signal to said wireless receiver upon user actuation, and wherein said computer is configured to perform a power on sequence and to launch a user-defined application program in response to receiving said signal.
2. The computer system of Claim 1, wherein the wireless receiver and the
10 wireless transmitter are configured for radio frequency communication.
3. The computer system of Claim 2, wherein said wireless receiver and wireless transmitter have a communication range of approximately 200 to 500 feet.
4. The computer system of Claim 1, wherein said hand-held controller
15 comprises at least two buttons, and wherein said hand-held controller is configured to send a first signal to said wireless receiver in response to user actuation of a first button and a second signal in response to user actuation of a second button, and wherein said computer is configured to launch a first application program in response to said first signal and a second application program in response to said second signal.
5. A method of remotely controlling a computer comprising transmitting a
20 signal from a hand-held controller to said computer, and in response thereto, placing said computer in an on state and launching a user specified application program.
6. The method of Claim 5 comprising the step of analyzing said signal to select an application for launch from a plurality of application programs.
7. The method of Claim 5, wherein said transmitting occurs over a distance
25 of approximately 200 to 500 feet.
8. A computer system, comprising:
a hand-held controller comprising a radio frequency transmitter, wherein
said controller is configured to transmit at least first and second different signals
in response to at least first and second different user actuation operations;
30 a computer comprising a radio frequency receiver; wherein said computer is configured to (1) receive said first and second different signals, (2)

analyze said first and second different signals, (3) perform a power up sequence in response to either said first signal or said second signal, (4) launch a first application program in response to said first signal, and (5) launch a second application program in response to said second signal.

5 9. The computer system of Claim 8, wherein said first and second different user actuation operations comprise depressing first and second buttons on said hand-held controller.

 10. A method of computer control comprising:
 sending a first signal approximately 200-500 feet from a controller to a
10 computer;
 in response thereto, placing said computer in an on state and launching a first application program;
 using said application program;
 powering down said computer;
15 sending a second different signal approximately 200-500 feet from said controller to said computer; and
 in response thereto, placing said computer in an on state and launching a second application program.

20 11. A remote control device for a personal computer comprising a hand-held housing containing wireless signal transmission circuitry for communicating with wireless signal receiving circuitry in said personal computer, wherein said housing comprises an attachment device for connecting said remote control device to a key ring, purse handle, or other commonly carried personal item.

25 12. The remote control device of Claim 11, additionally comprising a plurality of user actuated buttons for selecting from a plurality of remotely controlled personal computer functions.

 13. The remote control device of Claim 11, wherein said wireless transmission circuitry is configured to communicate with said wireless receiving circuitry over a range of approximately 200 to 500 feet.

30 14. A remote control device for a personal computer comprising:

a hand-held housing containing wireless signal transmission circuitry for communicating with wireless signal receiving circuitry in said personal computer; and

5 at least one user actuated control operative to initiate wireless signal transmission from said remote control device of a command to said personal computer to perform a power up sequence and launch a selected application program.

10 15. The remote control device of Claim 14, additionally comprising a second user actuated control operative to initiate wireless signal transmission from said remote control device of a command to said personal computer to perform a power up sequence and launch a different selected application program.

16. The remote control device of Claim 14, wherein said wireless transmission circuitry is configured to communicate with said wireless receiving circuitry over a range of approximately 200 to 500 feet.

15 17. A computer system comprising:
a computer comprising a power supply and a storage device storing application programs; and

20 hand-held remote control means for activating said power supply and launching a selected one of said application programs from a distance of approximately 200 to 500 feet.

18. A computer system comprising:
means for sending first and second different signals from a controller to a computer;

25 means for placing said computer in an on state and launching a first application program in response to said first signal; and

means for placing said computer in an on state and launching a second application program in response to said second signal.

30 19. A computer system comprising:
a computer;
a power source connectable to the computer so as to power operation of the computer;

at least one application program configured to operate in the computer;
and

5 a hand-held remote transmitter configured to send at least one signal causing both power to be applied from the power source to the computer so as to power up the computer and also causing the at least one application program to be launched on the computer.

REMOTE COMPUTER CONTROLLER AND CONTROL METHOD

Abstract of the Disclosure

5 A computer system is configured to be powered up by a hand-held controller. The hand-held controller is in wireless communication with a computer. One or more buttons on the hand-held controller may be used to automatically launch a particular application program which has been pre-selected by a computer user after completing the power up process.

10

S:\DOCS\TRA\TRA-3145.DOC
011700

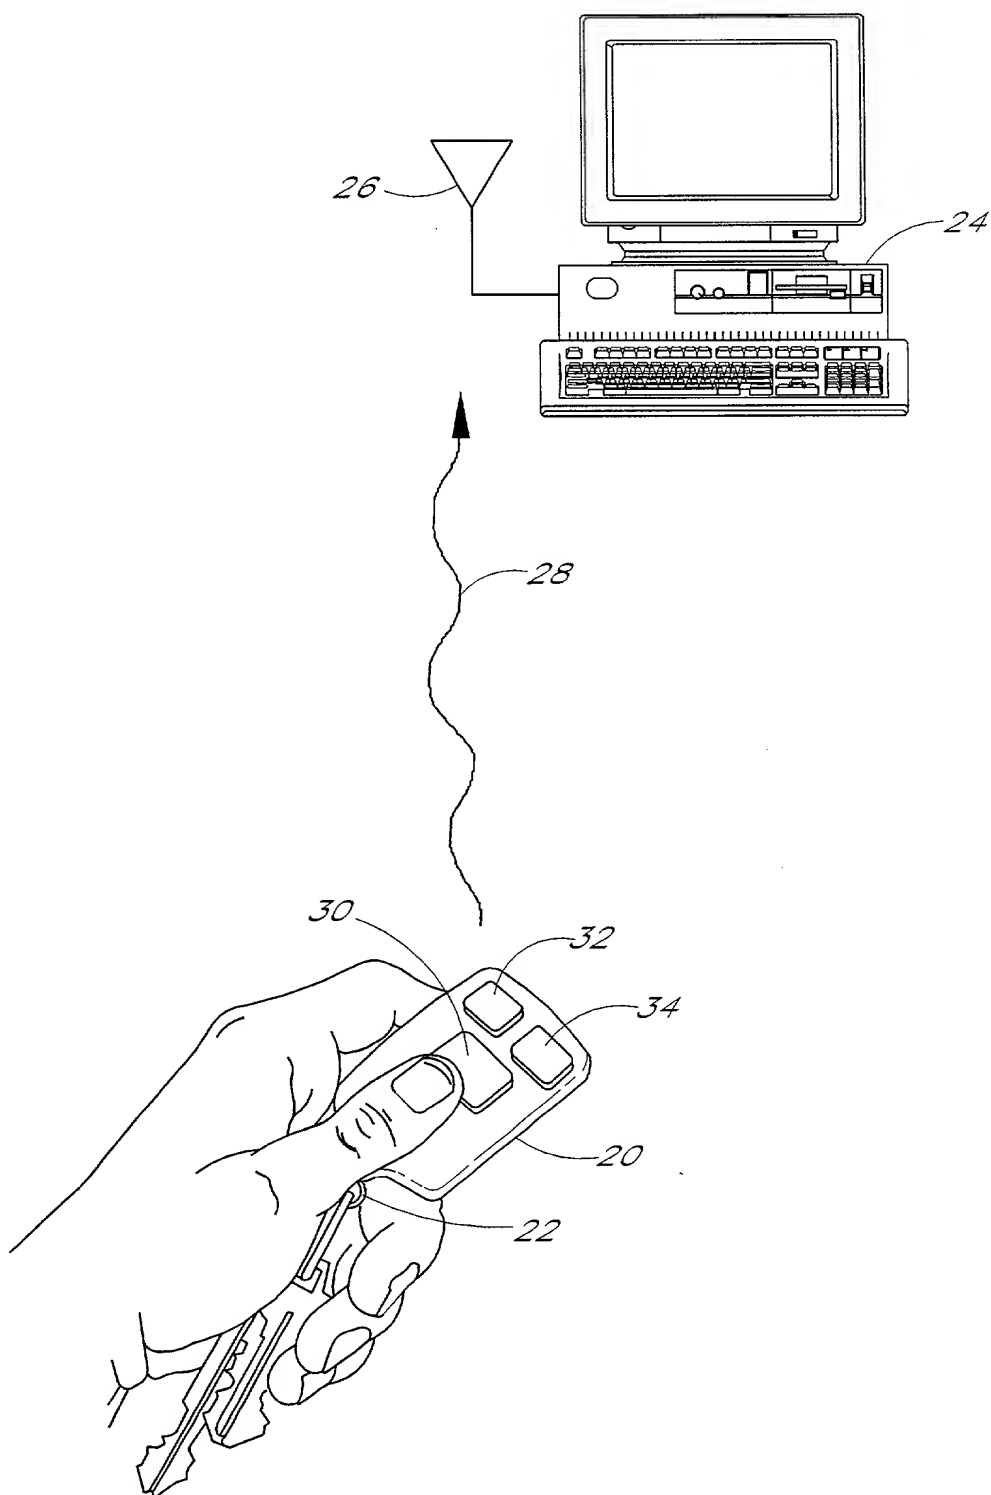


FIG. 1

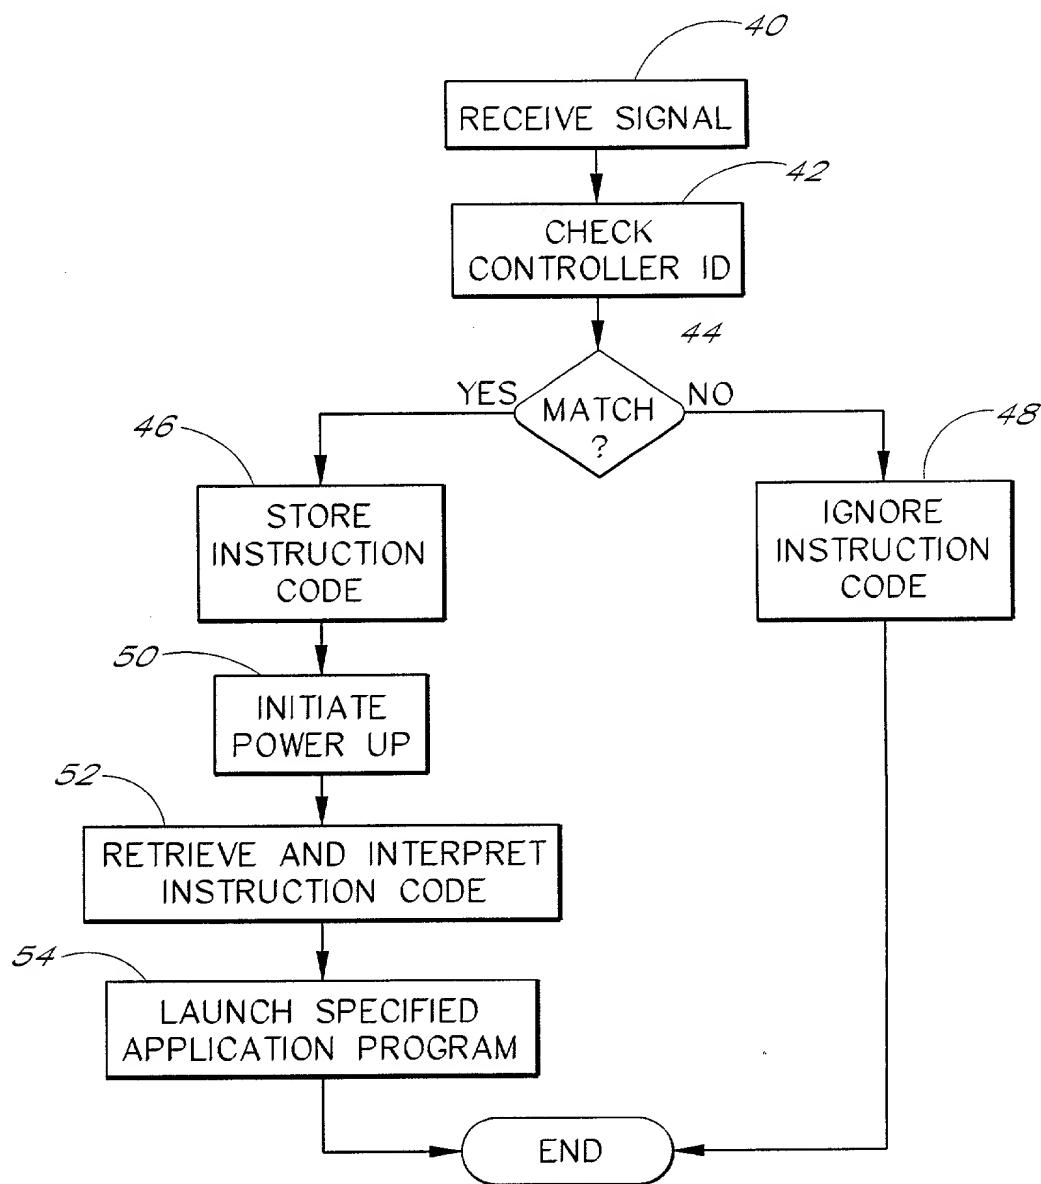


FIG. 2

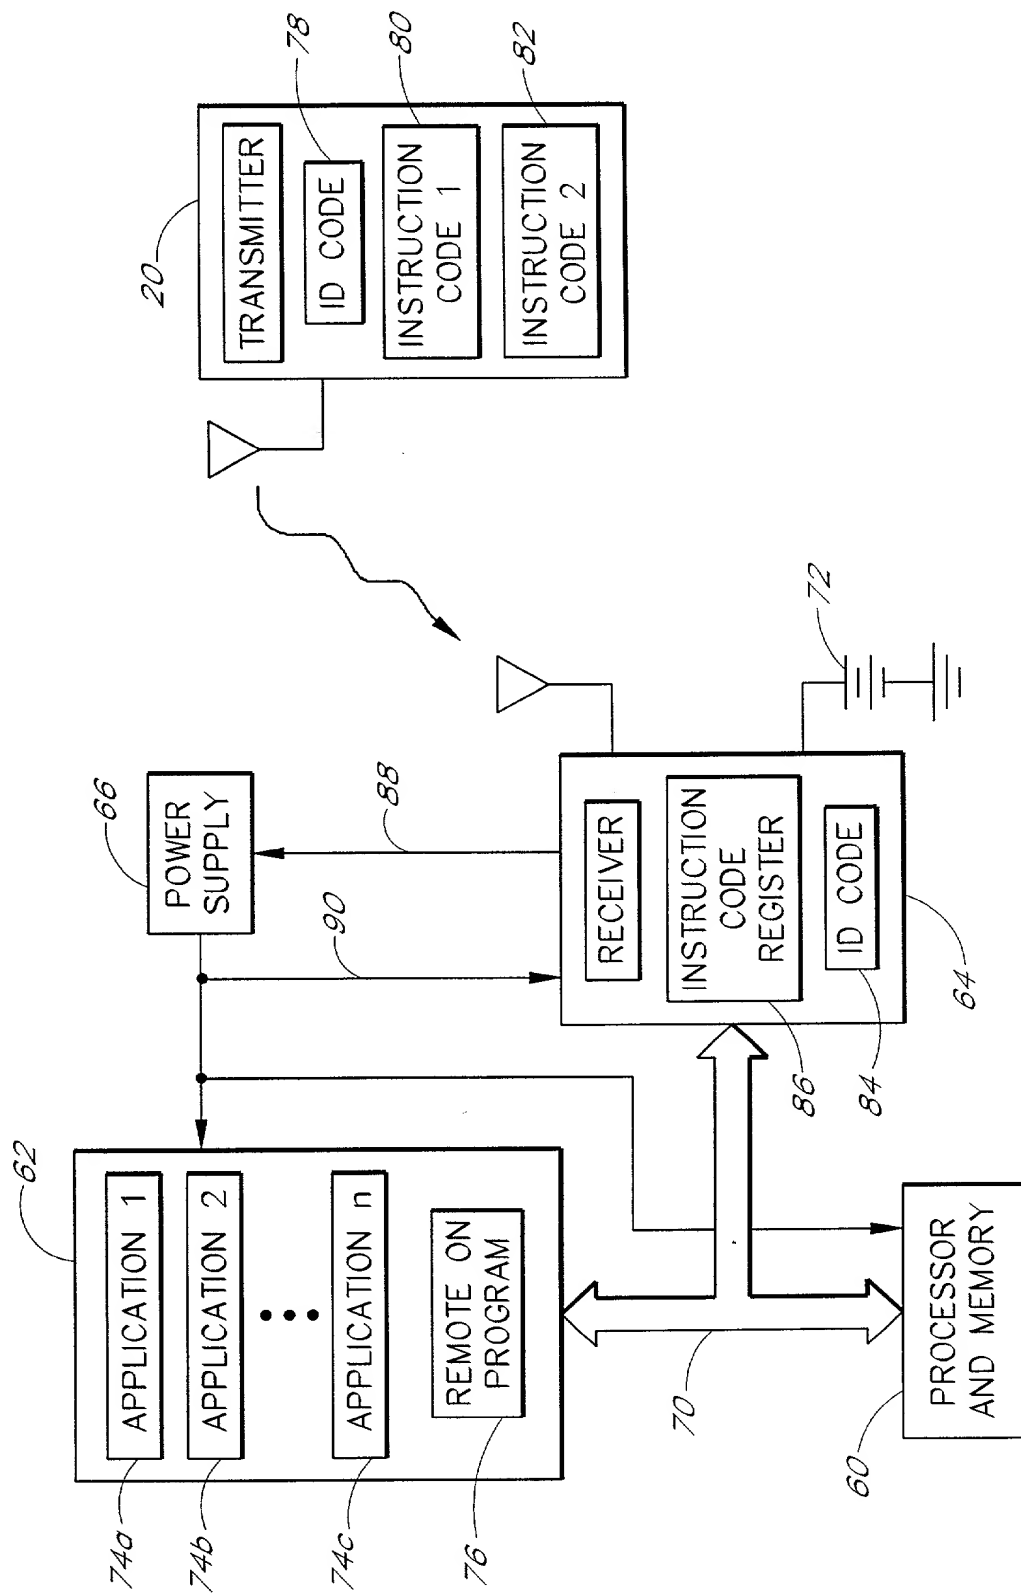


FIG. 3

DECLARATION - USA PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled REMOTE COMPUTER CONTROLLER AND CONTROL METHOD; the specification of which is attached hereto;

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above;

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56;

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful, false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first inventor: **Michael V. Leman**

Inventor's signature Michael V. Leman

Date 4/24/00

Residence: **270 E. Trailside Drive, Eagle, Idaho 83616**

Citizenship: **American**

Post Office Address: **Same as above**

Full name of second inventor: **William M. Creese**

Inventor's signature William M. Creese

Date 05/13/00

Residence: **36 WS 7th Avenue, Meridian, Idaho 83642**

Citizenship: **American**

Post Office Address: **Same as above**

Send Correspondence To:
KNOBBE, MARTENS, OLSON & BEAR, LLP
Customer No. 20,995

S:\DOCS\TRA\TRA-3430.DOC
041200

041200

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Michael V. Leman and William M.)
Creese)
App. No. : Unknown)
Filed : Herewith)
For : REMOTE COMPUTER)
CONTROLLER AND CONTROL)
METHOD)
Examiner : Unknown)

ESTABLISHMENT OF RIGHT OF ASSIGNEE TO TAKE ACTION
AND
REVOCATION AND POWER OF ATTORNEY

Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

The undersigned is empowered to act on behalf of the assignee below (the "Assignee"). A true copy of the original Assignment of the above-captioned application from the inventor(s) to the Assignee is attached hereto. This Assignment represents the entire chain of title of this invention from the Inventor(s) to the Assignee.

I declare that all statements made herein are true, and that all statements made upon information and belief are believed to be true, and further, that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. § 1001, and that willful, false statements may jeopardize the validity of the application, or any patent issuing thereon.

The undersigned hereby revokes any previous powers of attorney in the subject application, and hereby appoints the registrants of Knobbe, Martens, Olson & Bear, LLP, 620 Newport Center Drive, Sixteenth Floor, Newport Beach, California 92660, Telephone

App. No. : Unknown
Filed : Herewith

(949) 760-0404, **Customer No. 20,995**; also Steven P. Arnold, Registration No. 33,354, Hoyt A. Fleming, III, Registration No. 41,752, and Paul A. Revis, Registration No. 45,040, of Micron Electronics, Inc., 900 East Karcher Road, Nampa, Idaho 83687, Telephone (208) 898-3434, as its attorneys with full power of substitution and revocation to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected herewith. This appointment is to be to the exclusion of the inventor(s) and his attorney(s) in accordance with the provisions of 37 C.F.R. § 3.71.

Please use **Customer No. 20,995** for all communications.

MICRON ELECTRONICS, INC.

Dated: _____

5/16/10

By: _____



Paul A. Revis

Title: Intellectual Property Counsel

Address: 900 East Karcher Road
Nampa, Idaho 83687

S:\DOCS\TRA\TRA-3432.DOC
041200